


Proportional pressure reducing valve, pilot operated, with on-board elec- tronics (OBE) and position feedback

RE 29195/05.06
 Replaces: 07.05

1/10

Type DREBE6X

Nominal size (NG) 6
 Unit series 1X
 Maximum working pressure P 315 bar, T 250 bar
 Maximum flow rate 40 l/min

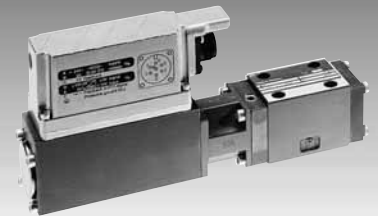

List of Contents

| Contents | Page |
|------------------------------|---------|
| Features | 1 |
| Ordering data | 2 |
| Preferred types, symbol | 2 |
| Function, sectional diagram | 3 |
| Technical data | 4 to 6 |
| On-board trigger electronics | 7 and 8 |
| Characteristic curves | 9 |
| Unit dimensions | 10 |

Features

- Pilot operated valves with position feedback and on-board electronics for reducing system pressure in the consumer (pilot oil internal only)
- 3-way version (P-A/A-T), $p_{\min} = p_T$
- Adjustable through the position of the armature against the compression spring
- Position-controlled, minimal hysteresis < 1 %, rapid response times, see Technical data
- Pressure limitation to a safe level even with faulty electronics (solenoid current $I > I_{\max}$)
- For subplate attachment, mounting hole configuration to ISO 4401-03-02-0-05. Subplates as per catalog sheet RE 45053 (order separately)
- Plug-in connector to DIN 43563-AM6, see catalog sheet RE 08008 (order separately)
- Data for the on-board trigger electronics
 - Complies with CE, EMC directives EN 61000-6-2: 2002-08 and EN 61000-6-3: 2002-08
 - $U_B = 24 V_{\text{nom}}$ DC
 - Electrical connection 6P+PE
 - Signal actuation
 - Standard 0...+ 10 V (A1)
 - Version 4...20 mA (F1)
 - Valve curve calibrated at the factory

Ordering data


| DREB | E | 6 | X-1X/ | M | G24 | K31 | | M | * |
|---|---|---|--|---|-----|-----|--|---|---|
| Proportional 3-way pressure reducing valve with inductive position transducer, pilot operated | | | Further information in plain text | | | | | | |
| With on-board electronics = E | | | M = NBR seals, suitable for mineral oils (HL, HLP) to DIN 51524 | | | | | | |
| Nominal size = 6 | | | Interface for trigger electronics | | | | | | |
| Mounting hole configuration to ISO 4401-03-02-0-05 = X | | | A1 = Setpoint input 0...+10 V | | | | | | |
| Unit series 10 to 19 (10 to 19: installation and connection dimensions unchanged) = 1X | | | F1 = Setpoint input 4...20 mA | | | | | | |
| Max. pressure stage | | | K31 = Electrical connection without plug-in connector, with unit plug to DIN 43563-AM6 Order plug-in connector separately | | | | | | |
| up to 75 bar = 75 | | | | | | | | | |
| up to 175 bar = 175 | | | | | | | | | |
| up to 310 bar = 310 | | | | | | | | | |
| Without non-return valve = M | | | | | | | | | |
| Voltage supply of trigger electronics 24 V DC = G24 | | | | | | | | | |

Preferred types

| Type....A1 (0...+10 V) | Material Number | Type....F1 (4...20 mA) | Material Number |
|--------------------------|-----------------|--------------------------|-----------------|
| DREBE6X-1X/75MG24K31A1M | 0 811 402 082 | DREBE6X-1X/175MG24K31F1M | 0 811 402 083 |
| DREBE6X-1X/175MG24K31A1M | 0 811 402 080 | DREBE6X-1X/310MG24K31F1M | 0 811 402 085 |
| DREBE6X-1X/310MG24K31A1M | 0 811 402 081 | | |

Symbol

For on-board electronics



Function, sectional diagram


General

Type DREBE6X proportional pressure reducing valves are pilot operated with a 3-way main stage.

The pilot valve (pressure relief valve pilot stage) is supplied internally with a controlled flow of pilot oil via P.

The valves are actuated by means of a position-controlled proportional solenoid with on-board electronics.

With these valves, the pressure in A (consumer) can be infinitely adjusted and reduced in relation to the setpoint.

 EN 61000-6-2: 2002-08
EN 61000-6-3: 2002-08


Basic principle

To adjust the system pressure in A, a setpoint is set in the trigger electronics. Based on this setpoint, the electronics control the position of the solenoid against the spring force. The proportional solenoid is positioned precisely on the spring characteristic curve. The pilot stage is supplied with oil from P at a flow rate of $< 0.6 \text{ l/min}$ via a flow control valve. The pilot pressure is compared with the consumer pressure (plus spring) in A and regulated.



The spring results in $p_{Amin} = p$ in T.

Pressure limitation for maximum safety

If a fault occurs in the electronics, so that the solenoid current (I_{max}) would exceed its specified level in an uncontrolled manner, the pressure cannot rise above the level determined by the maximum spring force.

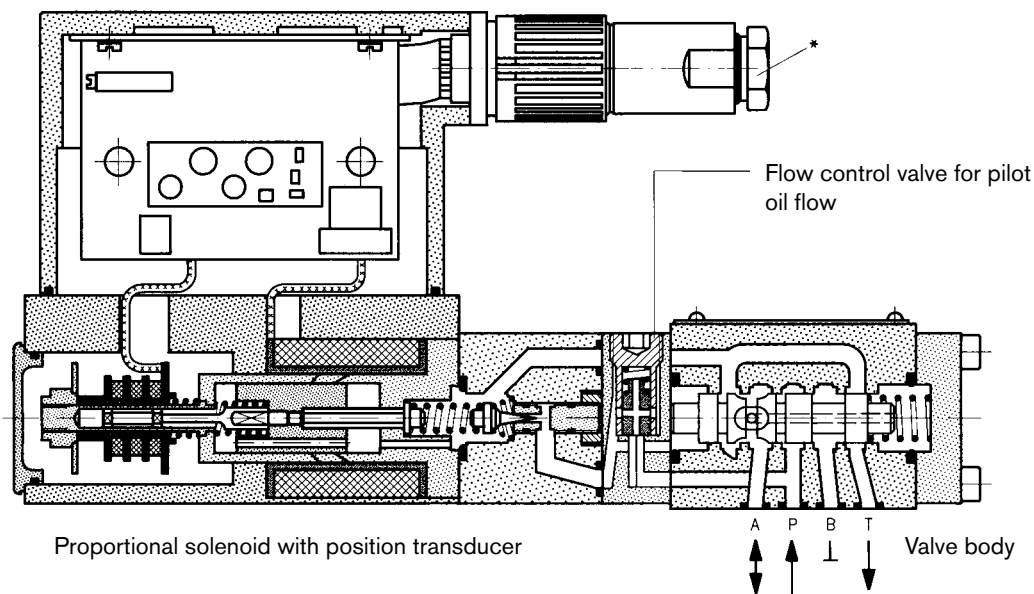

Accessories

| Type | | Material Number | |
|---|--|-----------------|---------------|
| (4 x)  ISO 4762-M5x30-10.9 | Cheese-head bolts | 2 910 151 166 | |
| *  | Plug-in connectors 6P+PE, see also RE 08008 | KS | 1 834 482 022 |
| | | KS | 1 834 482 026 |
| | | MS | 1 834 482 023 |
| | | MS | 1 834 482 024 |
| | | KS 90° | 1 834 484 252 |

Testing and service equipment

Test box type VT-PE-TB3, see RE 30065

Measuring adapter 6P+PE type VT-PA-2, see RE 30068


Technical data

| General | | |
|--------------------------------------|-------------|---|
| Construction | Pilot stage | Poppet valve |
| | Main stage | Spool valve |
| Actuation | | Proportional solenoid with position control and OBE |
| Connection type | | Subplate, mounting hole configuration NG6 (ISO 4401-03-02-0-05) |
| Mounting position | | Optional |
| Ambient temperature range | °C | -20...+50 |
| Weight | kg | 3.3 |
| Vibration resistance, test condition | | Max. 25 g, shaken in 3 dimensions (24 h) |

Hydraulic (measured with HLP 46, $\vartheta_{oil} = 40\text{ °C} \pm 5\text{ °C}$)

| | | | | |
|---|-----------------------------------|---|-----|-----|
| Pressure fluid | | Hydraulic oil to DIN 51524...535, other fluids after prior consultation | | |
| Viscosity range | recommended mm ² /s | 20...100 | | |
| | max. permitted mm ² /s | 10...800 | | |
| Pressure fluid temperature range | °C | -20...+70 | | |
| Maximum permitted degree of contamination of pressure fluid Purity class to ISO 4406 (c) | | Class 18/16/13 ¹⁾ | | |
| Direction of flow | | See symbol | | |
| Max. set pressure in A (at $Q_{min} = 1\text{ l/min}$) | bar | 75 | 175 | 310 |
| Minimum pressure in A | bar | 0 (relative) or pressure in T | | |
| Min. inlet pressure in P | bar | $p_P = p_A + \geq 5$ | | |
| Max. working pressure | bar | Port P: 315 | | |
| Max. pressure | bar | Port T: 250 (B sealed) | | |
| Internal pilot oil flow | l/min | approx. 0.6 (with closed-loop control) | | |
| Max. flow | l/min | 40 | | |

Static/Dynamic


| | | | | |
|-------------------------|--|-----------------------------------|----|--|
| Hysteresis | % | ≤ 1 of max. set pressure | | |
| Manufacturing tolerance | % | $\leq \pm 5$ of max. set pressure | | |
| Response time | 100% signal change | ms | 50 | |
| | 10% signal change | ms | 20 | |
| Thermal drift | <1% at $\Delta T = 40\text{ °C}$ | | | |
| Conformity |  EN 61000-6-2: 2002-08 EN 61000-6-3: 2002-08 | | | |

¹⁾ The purity classes stated for the components must be complied with in hydraulic systems. Effective filtration prevents problems and also extends the service life of components. For a selection of filters, see catalog sheets RE 50070, RE 50076 and RE 50081.


Technical data

| Electrical, trigger electronics integrated in valve | | |
|---|----|---|
| Cyclic duration factor | % | 100 |
| Degree of protection | | IP 65 to DIN 40050 and IEC 14434/5 |
| Connection | | Plug-in connector 6P+PE, DIN 43563 |
| Supply voltage | | 24 V DC _{nom} |
| Terminal A: | | Min. 21 V DC/max. 40 V DC |
| Terminal B: 0 V | | Ripple max. 2 V DC |
| Power consumption | | Solenoid \square 45 mm = 40 VA max. |
| External fuse | | 2.5 A _F |
| Input, "standard" version | A1 | Differential amplifier, $R_i = 100 \text{ k}\Omega$ |
| Terminal D: U_E | | 0...+10 V |
| Terminal E: | | 0 V |
| Input, "mA signal" version | F1 | Burden, $R_{sh} = 200 \Omega$ |
| Terminal D: I_{D-E} | | 4...20 mA |
| Terminal E: I_{D-E} | | Current loop I_{D-E} feedback |
| Max. voltage to differential inputs over 0 V | | $D \rightarrow B$ } max. 18 V DC $E \rightarrow B$ } |
| Test signal, "standard" version | A1 | LVDT |
| Terminal F: U_{test} | | 0...+10 V |
| Terminal C: | | Reference 0 V |
| Test signal, "mA signal" version | F1 | LVDT signal 4...20 mA at external load 200...500 Ω max. |
| Terminal F: I_{F-C} | | 4...20 mA output |
| Terminal C: I_{F-C} | | Current loop I_{F-C} feedback |
| Safety earth conductor and shield | | See pin assignment (installation in conformity with CE) |
| Recommended cable | | See pin assignment up to 20 m 7 x 0.75 mm ² up to 40 m 7 x 1 mm ² |
| Calibration | | Calibrated at the factory, see valve curve |

Version A1: Standard

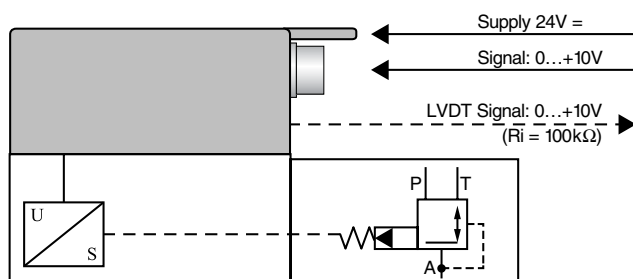


Version F1: mA signal

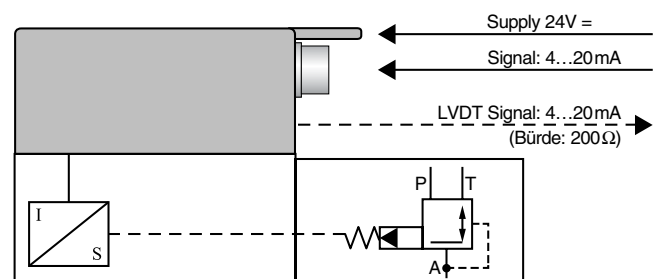

Connection

For electrical data, see page 5 and
Operating Instructions 1 819 929 083

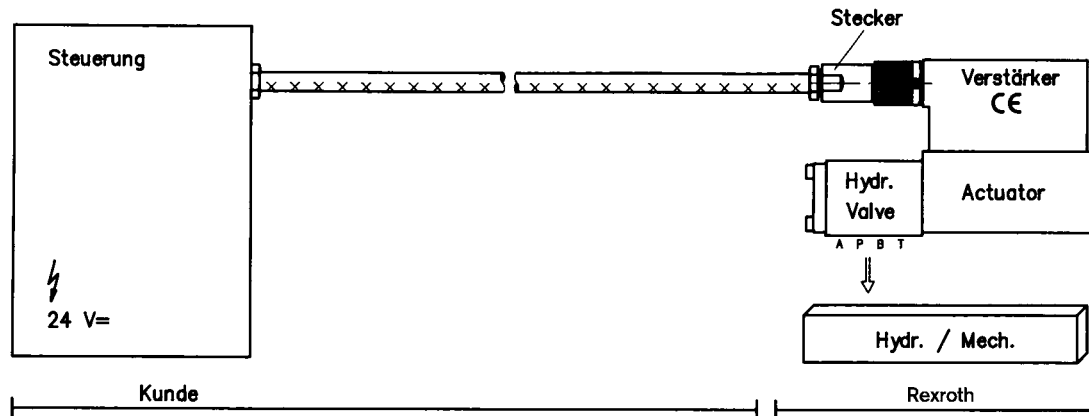

Technical notes for the cable

- Version:**
- Multi-wire cable
 - Extra-finely stranded wire to VDE 0295, Class 6
 - Safety earth conductor, green/yellow
 - Cu braided shield
- Type:**
- e.g. Ölflex-FD 855 CP (from Lappkabel company)
- No. of wires:**
- Determined by type of valve, plug type and signal assignment
- Cable Ø:**
- 0.75 mm² up to 20 m long
 - 1.0 mm² up to 40 m long
- Outside Ø:**
- 9.4...11.8 mm – Pg 11
 - 12.7...13.5 mm – Pg 16

Important

Voltage supply 24 V DC nom.,
if voltage drops below 18 V DC, rapid shutdown resembling
“Enable OFF” takes place internally.

In addition, with the “mA signal” version:

$I_{D-E} \geq 3 \text{ mA}$ – valve is active

$I_{D-E} \leq 2 \text{ mA}$ – valve is deactivated.


Electrical signals emitted via the trigger electronics (e.g. actual values) must not be used to shut down safety-relevant machine functions!

(See also European Standard, “Technical Safety Requirements for Fluid-Powered Systems and Components – Hydraulics”, EN 982.)

On-board trigger electronics

Circuit diagram/pin assignment


Version A1: U_{D-E} 0...+10 V

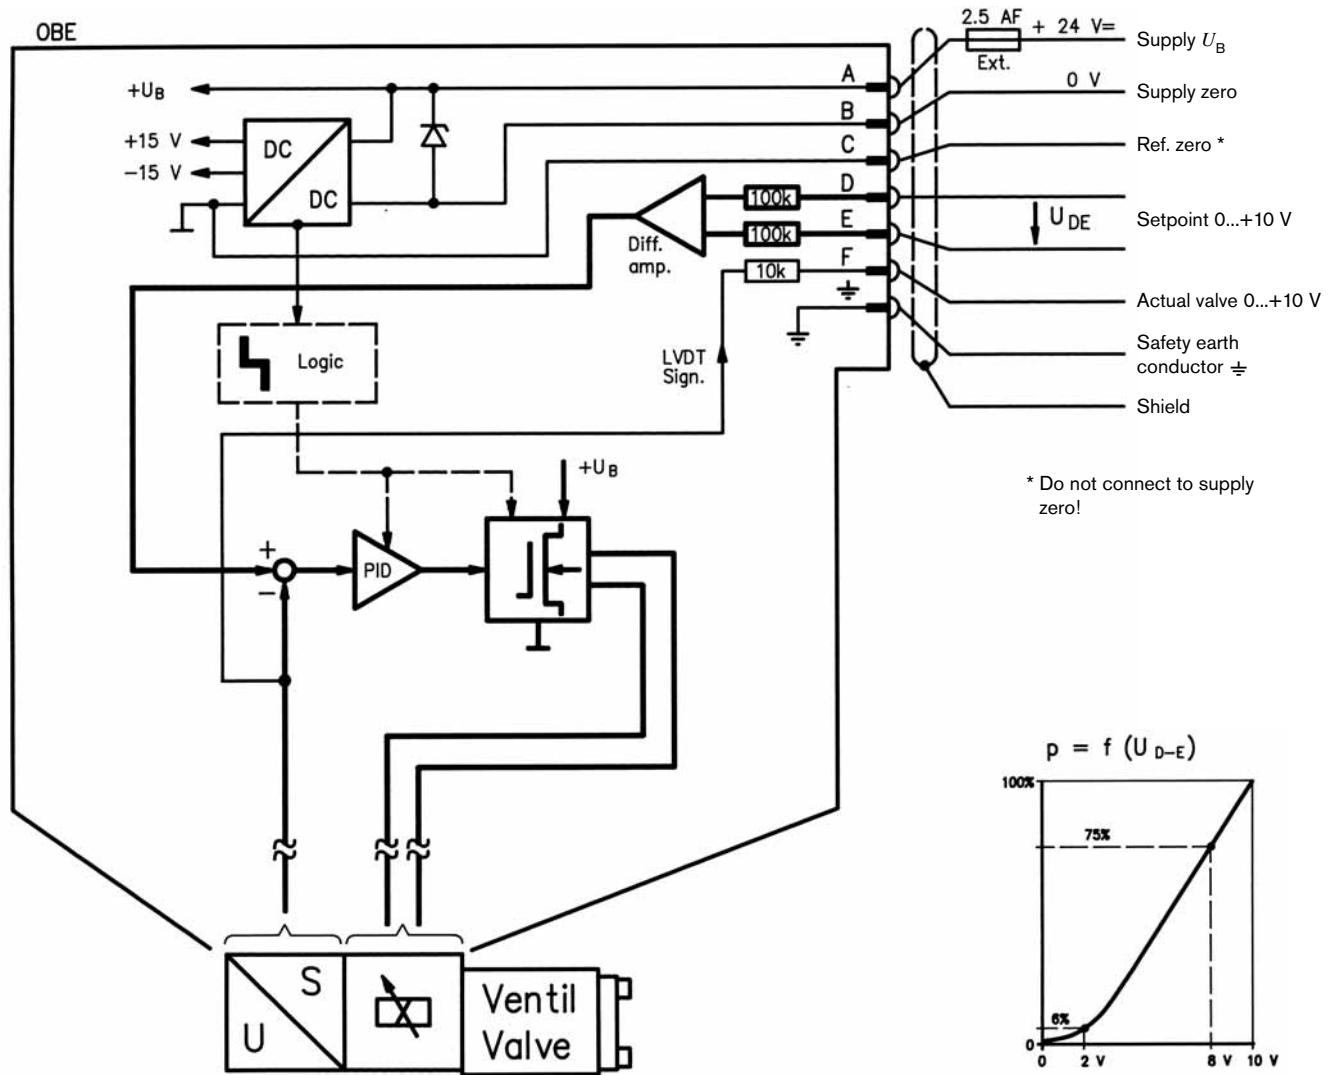

Pin assignment

Version A1: U_{D-E} 0...+10 V


($R_i = 100\text{ k}\Omega$)

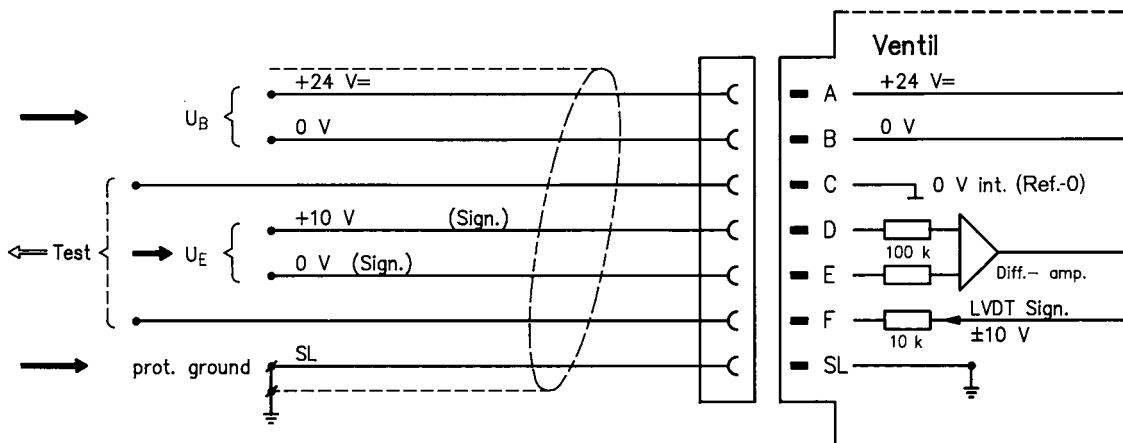

On-board trigger electronics

Circuit diagram/pin assignment


Version F1: I_{D-E} 4...20 mA

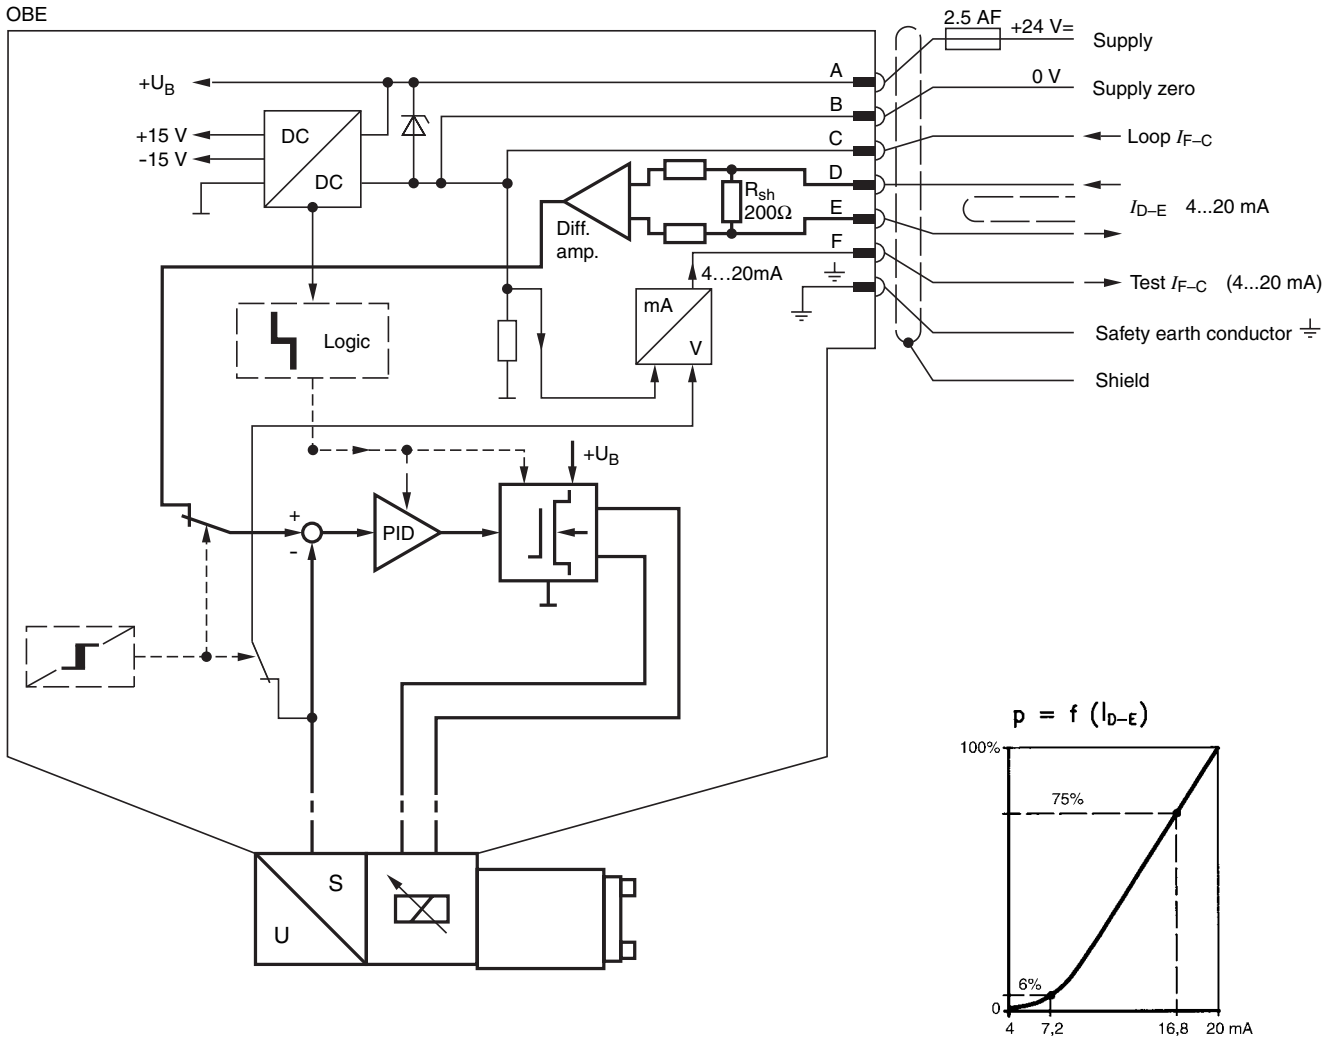

Pin assignment 6P+PE


Version F1: I_{D-E} 4...20 mA

($R_{sh} = 200 \text{ k}\Omega$)

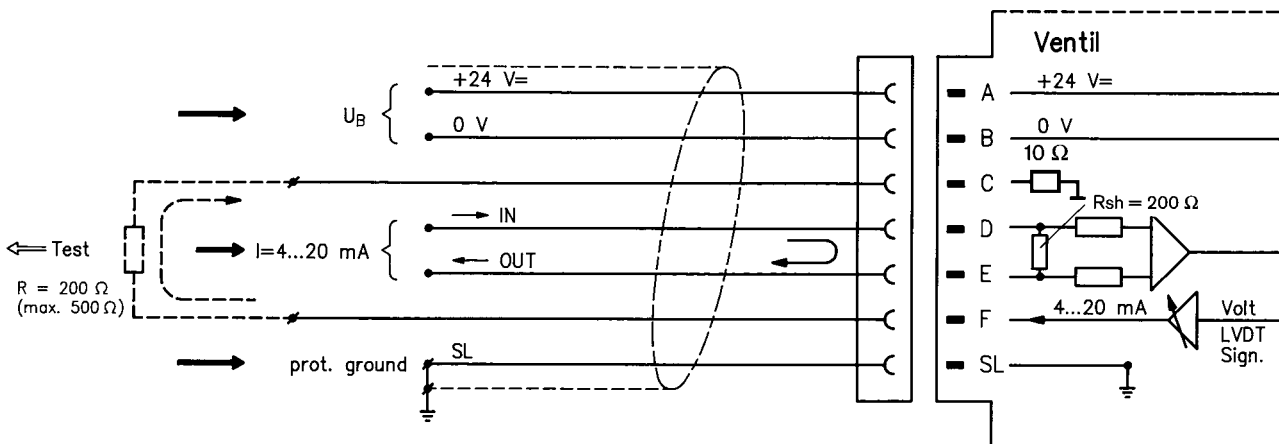


Characteristic curves (measured with HLP 46, $\vartheta_{oil} = 40^\circ\text{C} \pm 5^\circ\text{C}$)

Pressure in port A as a function of the setpoint

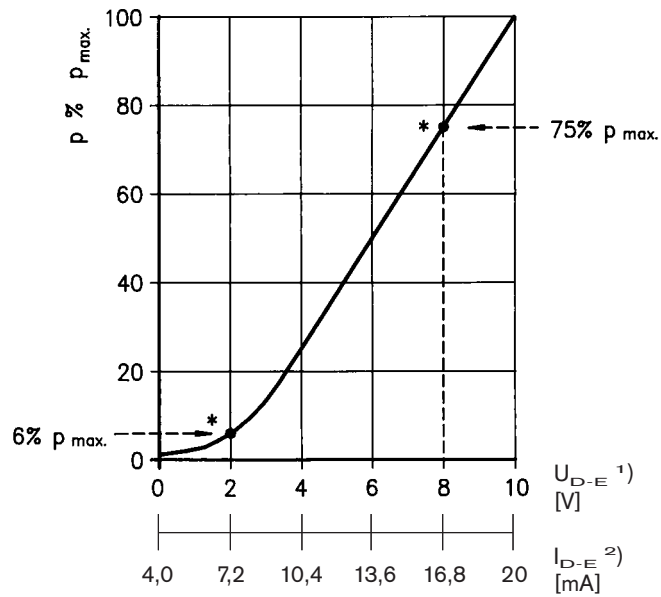


- * Factory setting at $Q = 1 \text{ l/min}$
+5% manufacturing tolerance (of max. set pressure)
- 1) Version: $U_{D-E} = 0 \dots +10 \text{ V}$
- 2) Version: $I_{D-E} = 4 \dots 20 \text{ mA}$

Pressure in port A proportionate to the maximum flow rate of the main stage

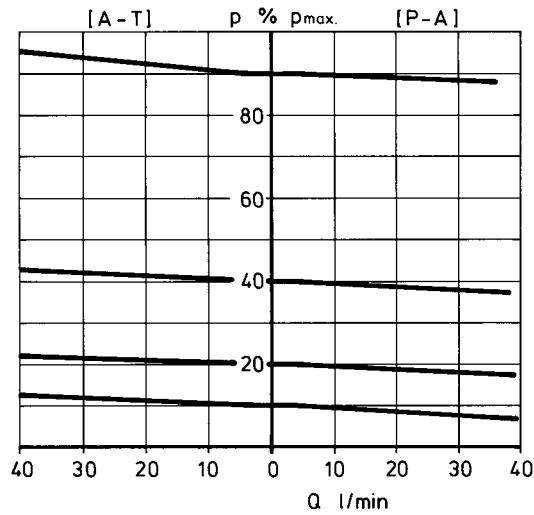

Set pressure
 $p \% p_{max} = f(Q_{P-A}/Q_{A-T})$



Notes

Bosch Rexroth AG
Hydraulics
Zum Eisengießer 1
97816 Lohr am Main, Germany
Telefon +49 (0) 93 52 / 18-0
Telefax +49 (0) 93 52 / 18-23 58
documentation@boschrexroth.de
www.boschrexroth.de

© This document, as well as the data, specifications and other information set forth in it, are the exclusive property of Bosch Rexroth AG. It may not be reproduced or given to third parties without its consent.

The data specified above only serve to describe the product. No statements concerning a certain condition or suitability for a certain application can be derived from our information. The information given does not release the user from the obligation of own judgement and verification. It must be remembered that our products are subject to a natural process of wear and aging.

Notes
